Head office

Size 5x4 m

Size 6x5 m



44 mm straight



44 mm angle*



70 mm straight




70 mm angle*




- Standard log thickness 44 mm. Log thickness 70 mm maybe available on request.
- Double glazed doors and windows
- Double rubber gasket for windows and doors
- Assembly kit (including nails for bitumen shingles)
- Bitumen shingles are supplied as optional extras
- Roof and floor boards from 19 mm thickness, T&G
- Partition for WC room 1x2.5m, internal door included
- This model is reversible (during installation)

** Rounded notches maybe available on request.*

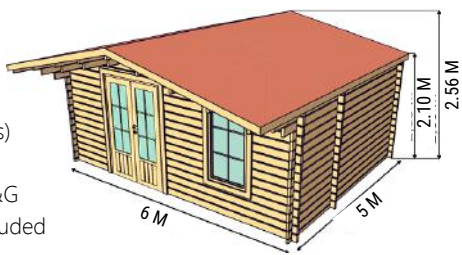



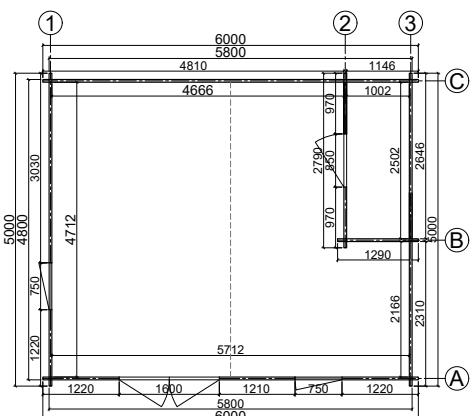

mm	m	m	m^2	m	m	m	m^2	vnt.	vnt.	mm	
44	5x4	4.8x3.8	17.49	2.10	2.56	1	27.61	2	2	19	-
44	6x5	4.8x5.8	26.91	2.10	2.56	1	36.72	2	2	19	-