

Oslo

Size 6x4 m



44 mm
straight



44 mm
angle*



70 mm
straight




70 mm
angle*



- Standard log thickness 44 mm. Log thickness 70 mm maybe available on request.
- Double glazed doors and windows
- Double rubber gasket for windows and doors
- Ridge height up to 2.5 m
- Assembly kit (including nails for bitumen shingles)
- Bitumen shingles are supplied as optional extras
- Roof and floor boards from 19 mm thickness, T&G
- This model is reversible (during installation)

* Rounded notches maybe available on request.

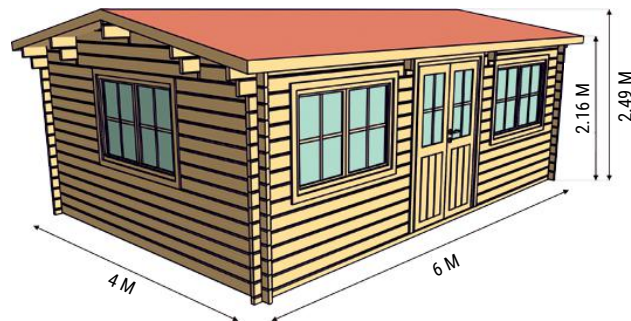

mm

44



m

6x4



m

5.8x3.8



m²

21.2



m

2.16



m

2.49



m

0.2



m²

27.28



vnt.

1



vnt.

2



mm

19



+